



TEGUH® CABLE TENSION TENT

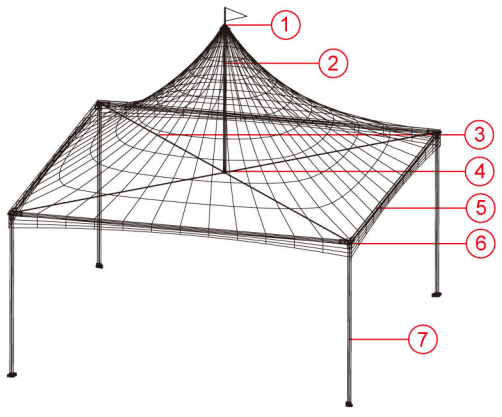

Parts

1. Cap
2. Center pole
3. Cable
4. Cable center point lock
5. Main frame
6. Side fitting
7. Main column
8. Flag
9. Canvas (cover material)
10. Ratchet
11. Stand plate

Product Specification	3M x 3M TKCTT-63.5-ALU3M3M	6M x 6M TKCTT-63.5-ALU6M6M
Width/Length	3000mm	6000mm
Ridge height	4813mm	5855mm
Longest component	2860mm	5860mm
Main Column	2930mm	2930mm
Main frame profile	Ø63.5mm	Ø63.5mm
Aluminium (connection)	Insertion Fitting	Insertion Fitting
Maximum allowed wind speed	80km/hour	80km/hour
Framework material	Hard pressed extruded anodised aluminium T6061/T6	Hard pressed extruded anodised aluminium T6061/T6
Cover Material Specification	PVC-laminated polyester textile	Weight: 440gsm Yarn: 250/250 Denier
	PVC-coated polyester textile	Weight: 530gsm Yarn: 1000/1000 Denier
	PVC-laminated polyester textile with Blackout	Weight: 510gsm (15oz) Yarn: 1100/1100 Denier



- HIGH QUALITY
- LONG LASTING
- SATISFACTION GUARANTEED

MALAYSIA
TENSIONED FABRIC STRUCTURE SDN. BHD.
 No. 30, Jalan Mawar, Taman P. Ramlee,
 Setapak 53000 Kuala Lumpur, Malaysia
 Tel: +603-4021 7197 +603-4021 7788
 Fax: +603-4022 4346
 Email: enquiry@tfssb.com

